Setup Guide — MTP 4T 15HD RS

This sheet provides quick start instructions for an experienced installer to set up and operate the MTP 4T 15HD RS multiple VGA video and RS-232 transmitters.

NOTE

Each MTP 4T 15HD RS transmitter requires and at least one connected compatible MTP receiver. Additional receivers can be daisy chained.

IMPORTANT: IMPORTANT: Or the Refer to www.extron.com for the user manual and installation user to the power supply.


Installation

Step 1 — Mounting

Turn off or disconnect all equipment power sources and mount the unit as required.

Step 2 — Transmitter inputs

- Connect a computer (VGA) video source to each Input connector.
- Connect a VGA monitor to each Monitor connector.
- Plug an RS-232 device into each RS-232 port. Wire the connectors as shown below.




Step 3 — TP cables

Terminate up to four TP cables as shown at right. Connect them between each transmitter's Output port and a receiver's Input port.

Step 6 — Power

Plug a standard IEC power cord between the unit's power connector and 100 VAC to 240 VAC, 50 or 60 Hz power source.




 \odot

Insert Twisted
Pair Wires

NOTE If you are using Enhanced
Skew-Free™ A/V cable, use the
TIA/EIA T568A standard only.

Brown

8 Brown

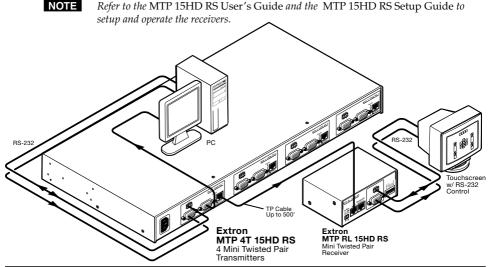

Extron USA - West Headquarters +800.633.9876 Inside USA / Canada Only

+1.714.491.1500

Extron USA - East +800.633.9876 Inside USA / Canada Only +1.919.863.1794 +1.919.863.1797 FAX Extron Europe +800.3987.6673 Inside Europe Only +31.33.453.4040 +31.33.453.4050 FAX Extron Asia +800.7339.8766 Inside Asia Only +65.6383.4400 +65.6383.4664 FAX Extron **Japan** +81.3.3511.7655 +81.3.3511.7656 FAX Extron China +400.883.1568 Inside China Only +86.21.3760.1568 +86.21.3760.1566 FAX

Extron Middle East +971.4.2991800 +971.4.2991880 FAX

> 68-1398-50 **Rev. A** 02 09